



## WT7511

### GENERAL DESCRIPTION

The WT7511 provides protection circuits, power good output (PGO), fault protection latch (FPL\_N), and a protection detector function (PDON\_N) control. It can minimize external components of switching power supply systems in personal computer.


The Over Voltage Detector (OVD) monitors 3.3V, 5V, 12V input voltage level. When OVD detect the fault voltage level, the FPL\_N is latched HIGH and PGO go low. The latch can be reset by PDON\_N go HIGH. There is 2.4 ms delay time for PDON\_N turn off FPL\_N.

When OVD and UVD detect the right voltage level, the power good output (PGO) will be issue.

### FEATURES

- The Over Voltage Detector (OVD) monitors 3.3V, 5V, 12V input voltage level.
- Both of the power good output (PGO) and fault protection latch (FPL\_N) are Open Drain Output.
- 300 ms time delay for PGO.
- 38 ms for PDON\_N input signal De-bounce.
- 73 us for internal signal De-glitches.
- 2.4 ms time delay for PDON\_N turn-off FPL\_N.

### PIN ASSIGNMENT AND PACKAGE TYPE

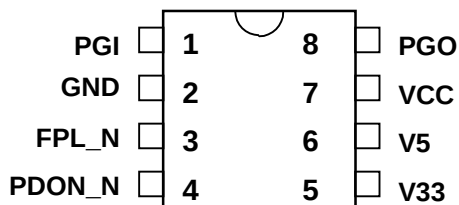

| Package type       | ORDERING INFORMATION |
|--------------------|----------------------|
| 8-Pin Plastic DIP  | WT7511-N080WT-12     |
| 8-Pin Plastic SOIC | WT7511-S080WT-12     |

### PIN DESCRIPTION

| Pin No. | Pin Name | TYPE | Description                                           |
|---------|----------|------|-------------------------------------------------------|
| 1       | PGI      | I    | power good input pin                                  |
| 2       | GND      | P    | Ground                                                |
| 3       | FPL_N    | O    | fault protection latch output pin(open drain output)  |
| 4       | PDON_N   | I    | protection detector function ON/OFF control input pin |
| 5       | V33      | I    | 3.3V input pin                                        |
| 6       | V5       | I    | 5V input pin                                          |
| 7       | VCC      | I    | Supply voltage / 12V input pin                        |
| 8       | PGO      | O    | power good output pin(open drain output)              |

### E-Tech Electronics Ltd.

#### Hong Kong Headquarters:

Unit D, 3/F., Unison Industrial Centre,  
27-31 Au Pui Wan Street, Fo Tan, Shatin, N.T. H.K.  
Tel.: (852) 2607 0218 Fax (852) 2607 0155  
E-Mail: mktg@e-tech.com.hk  
Web Site: <http://www.e-tech.com.hk>

#### ShenZhen Branch:

Unit 1403, 14/F., Pacific Commercial Building,  
Chia Pin Road, ShenZhen, China  
Tel: (0755) 2136 018 Fax: (0755) 2136 008  
E-Mail: sales\_sz@e-tech.com.hk