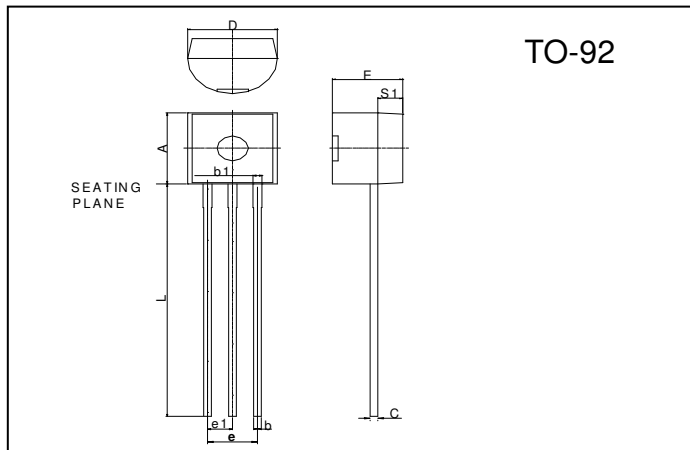



GBC547**NPN SILICON TRANSISTOR****Description**

The GBC547 is designed for drive and output-stages of audio amplifiers.

Features

- High DC Current Gain: 110~800 @ $V_{CE}=5V$, $I_C=2mA$
- Complementary to GBC557

Package Dimensions**Marking :**

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.45	4.7	D	4.44	4.7
S1	1.02	-	E	3.30	3.81
b	0.36	0.51	L	12.70	-
b1	0.36	0.76	e1	1.150	1.390
C	0.36	0.51	e	2.42	2.66

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	45	V
Emitter to Base Voltage	V_{EBO}	6	V
Collector Current (continuous)	I_C	100	mA
Total Device Dissipation @ $T_A = 25^\circ\text{C}$	P_D	625	mW
Derate above 25°C		5.0	mW/ $^\circ\text{C}$
Total Device Dissipation @ $T_C = 25^\circ\text{C}$	P_D	1.5	W
Derate above 25°C		12	mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature	T_J, T_{stg}	-55 ~ +150	$^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	$^\circ\text{C/W}$

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
V_{CBO}	50	-	-	V	$I_C=100\mu A, I_E=0$
V_{CEO}	45	-	-	V	$I_C=1mA, I_B=0$
V_{EBO}	6	-	-	V	$I_E=10\mu A, I_C=0$
I_{CES}	-	-	15	nA	$V_{CE}=50V, V_{BE}=0$
* $V_{CE(sat)1}$	-	0.09	0.25	V	$I_C=10mA, I_B=0.5mA$
* $V_{CE(sat)2}$	-	0.2	0.6	V	$I_C=100mA, I_B=5mA$
* $V_{BE(sat)}$	-	0.7	-	V	$I_C=10mA, I_B=0.5mA$
* $V_{BE(on)1}$	0.55	-	0.7	V	$V_{CE}=5V, I_C=2mA$
* $V_{BE(on)2}$	-	-	0.77	V	$V_{CE}=5V, I_C=10mA$
* h_{FE}	110	-	800		$V_{CE}=5V, I_C=2mA$
fT	150	300	-	MHz	$V_{CE}=5V, I_C=10mA, f=100MHz$
Cob	-	1.7	4.5	pF	$V_{CB}=10V, I_C=0, f=1MHz$

*Pulse Test: Pulse Width $\leq 380\mu s$, Duty Cycle $\leq 2\%$

Classification Of h_{FE}

Rank	A	B	C
Range	110 ~ 220	200 ~ 450	420 ~ 800

Characteristics Curve

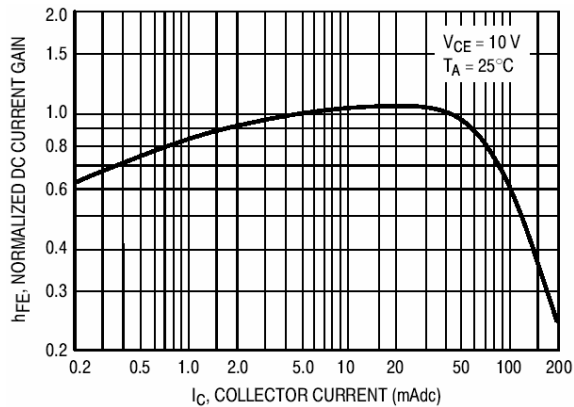


Fig 1. DC Current Gain

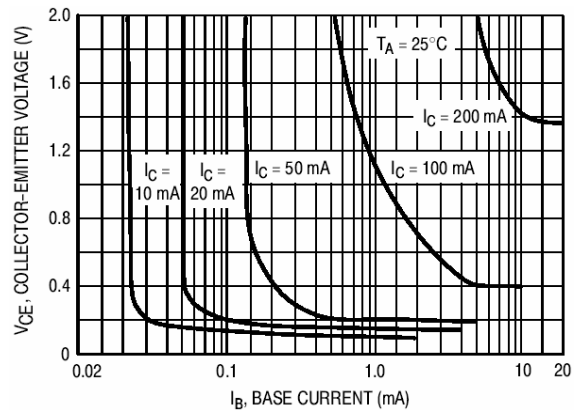


Fig 2. Collector Saturation Region

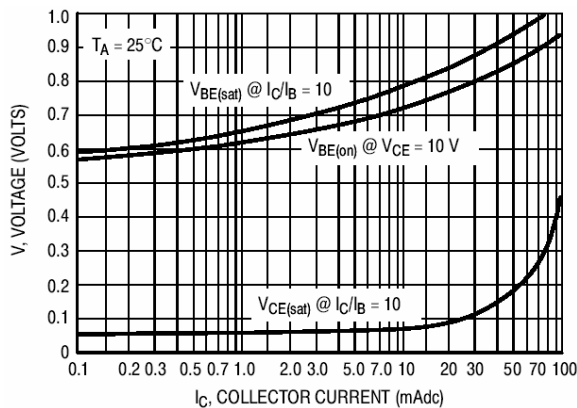


Fig 3. "Saturation" & "On" Voltages

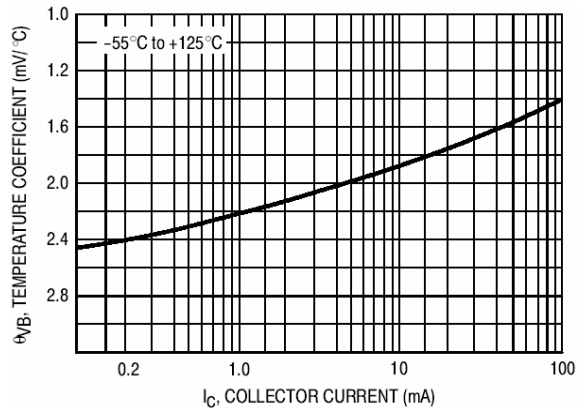


Fig 4. Temperature Coefficients

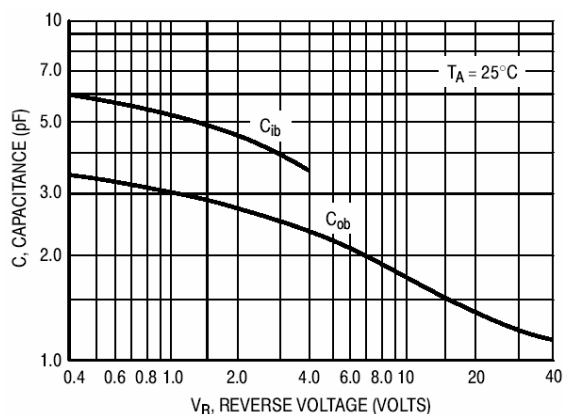


Fig 5. Capacitances

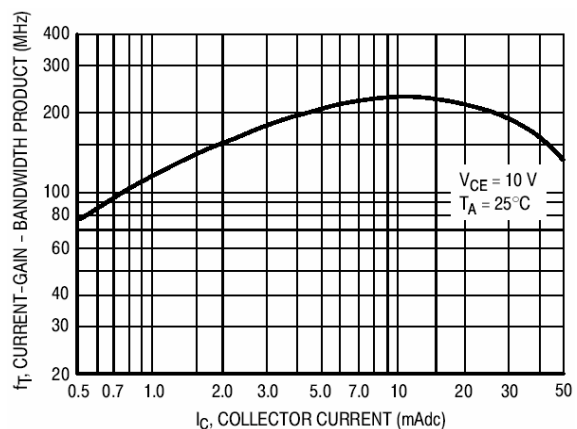


Fig 6. Bandwidth Product

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165