


GLA27 NPN TRANSISTOR


Description

The GLA27 is designed for darlington amplifier high current gain collector current to 500mA.

Package Dimensions

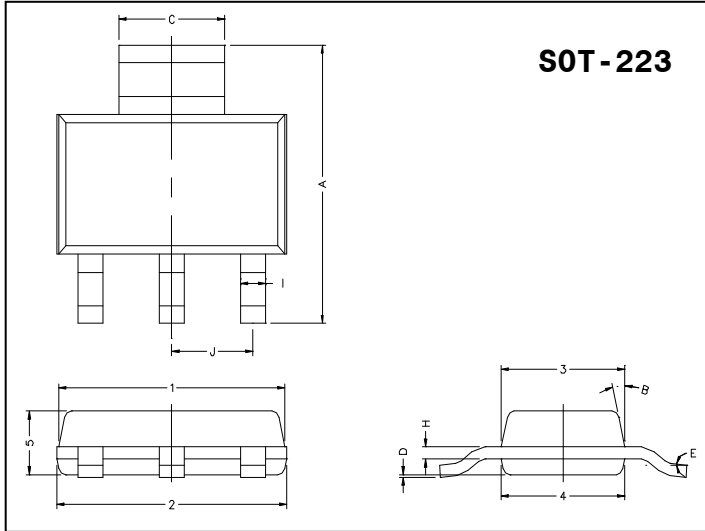

Marking :



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.70	7.30	B	13° TYP.	
C	2.90	3.10	J	2.30 REF.	
D	0.02	0.10	1	6.30	6.70
E	0°	10°	2	6.30	6.70
I	0.60	0.80	3	3.30	3.70
H	0.25	0.35	4	3.30	3.70
			5	1.40	1.80


Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage	VCBO	60	V
Collector to Emitter Voltage	VCES	60	V
Emitter to Base Voltage	VEBO	10	V
Collector Current	IC	500	mA
Total Power Dissipation	PD	2	W

Characteristics at Ta = 25°C

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVCBO	60	-	-	V	IC=100uA, IE=0
BVCES	60	-	-	V	IC=100uA, VBE=0
BVEBO	10	-	-	V	IE=10uA, IC=0
ICBO	-	-	100	nA	VCB=50V, IE=0
IEBO	-	-	100	nA	VEB=10V, IC=0
ICES	-	-	500	nA	VCE=50V
VCE(sat)	-	-	1.5	V	IC=100mA, IB=0.1mA
VBE(sat)	-	-	2.0	V	IC=100mA, VCE=5V
hFE1	10K	-	-		VCE=5V, IC=10mA
hFE2	10K	-	-		VCE=5V, IC=100mA

Characteristics Curve

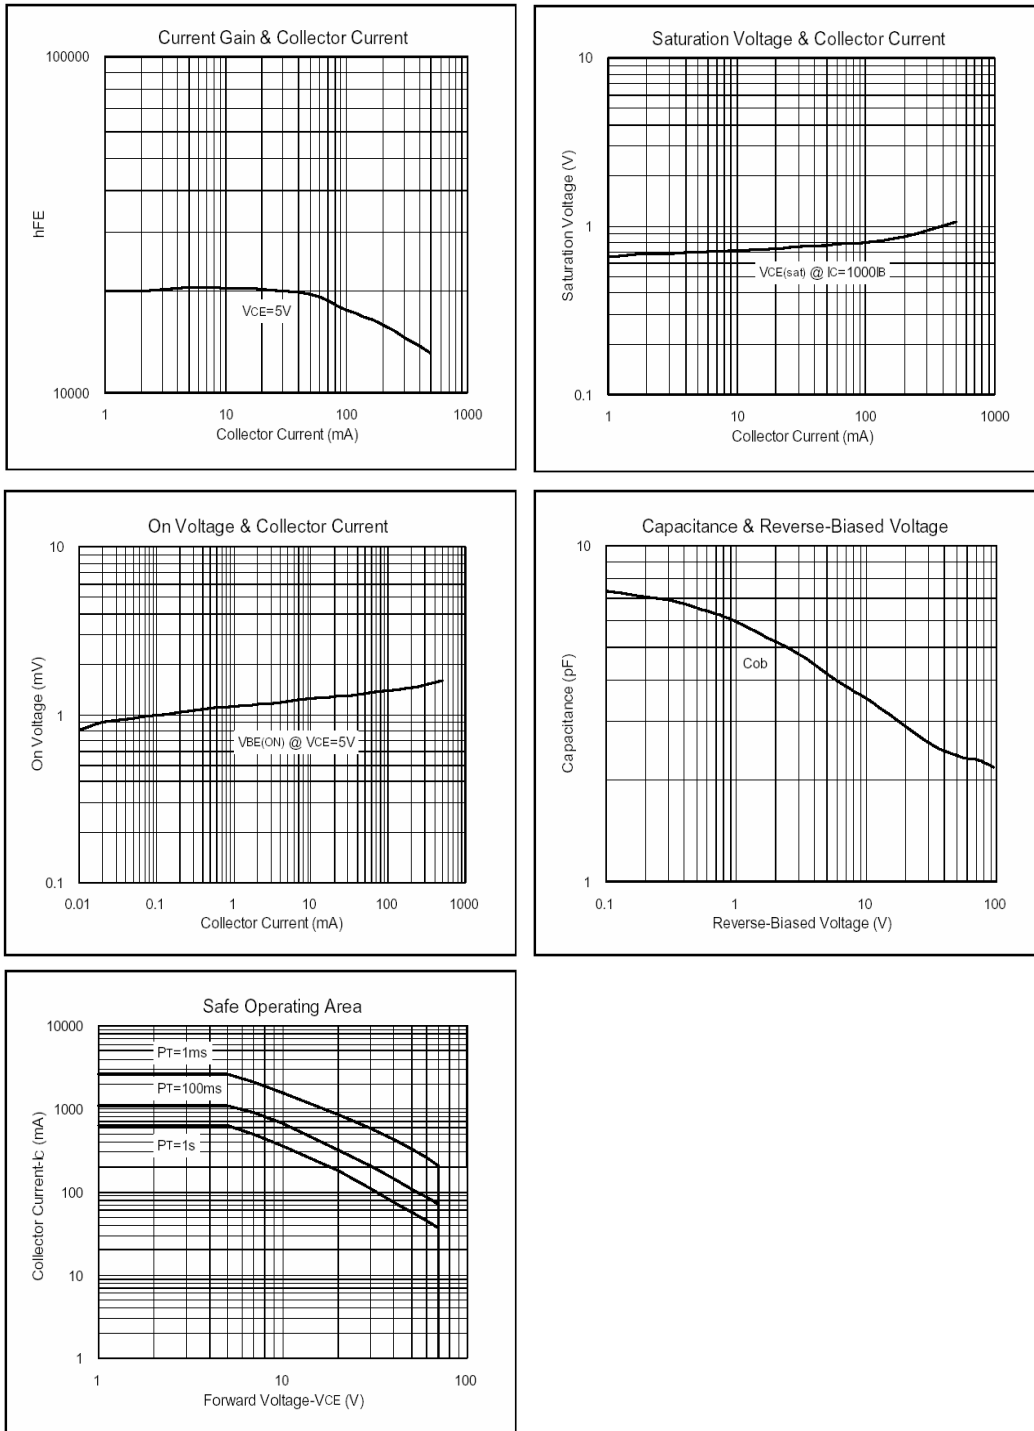

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 FAX : 86-21-38950165